




CARACTERÍSTICAS	
<b>Especificaciones</b>	1.2 MP a 13m/s -40° C - 150° C
<b>Cara Estacionaria</b>	Cerámica / SIC / TC
<b>Cara Rotativa</b>	Carbón / SIC / TC
<b>Sello Secundario</b>	NBR / EPDM / VITON
<b>Resorte y otras Partes</b>	Acero

**DIMENSIONES**

d	D	D1	L1	L2
10	20	21	5	15.2
12	22	23	6	15.2
14	24	25	6	15.2
15	25	26	6	15.2
16	26	27	6	15.2
18	32	33	6	20.2
20	34	35	6	20.2
22	36	37	6	20.2
24	38	39	6	20.2
25	39	40	6	20.2
28	42	43	6	26.2
30	44	45	7	26.2
32	46	48	7	26.2
33	47	48	7	26.2
35	49	50	8	26.2
38	54	56	8	30.2
40	56	58	8	30.2
43	59	61	8	30.2
45	61	63	8	30.2
48	64	66	10	30.2
50	66	70	10	30.2
53	69	73	10	30.2
55	71	75	10	30.2
58	78	78	10	33.2
60	80	80	12	33.2
63	83	83	12	33.2
65	85	85	12	33.2
68	88	90	12	33.2
70	90	92	12	33.2
75	99	97	12	40.2
80	104	105	14	40.2
85	109	110	14	40.2
90	114	115	14	40.2
95	119	120	14	40.2
100	124	125	14	40.2

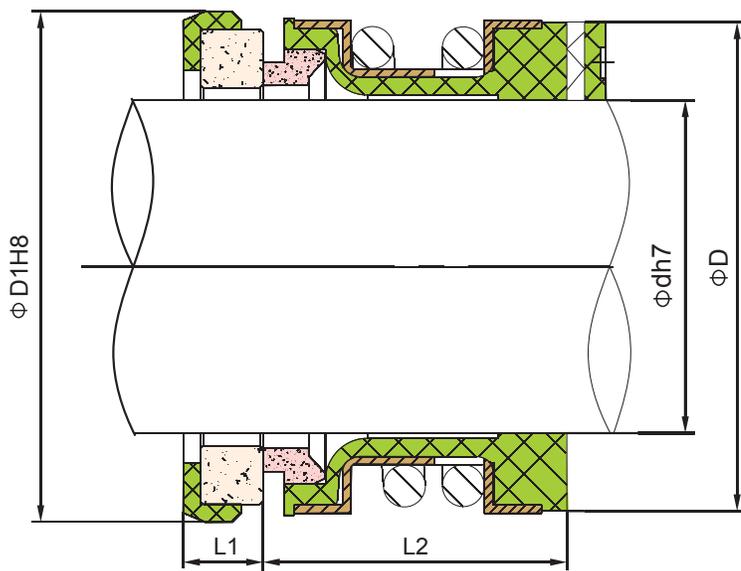

NOTA: Todas las medidas son en milímetros.